

Now you will create the half square triangles for the outer corners of FQ A heart tops.


Draw a diagonal line on the back of the (2) 2 inch background squares. Place the squares RST with the FQ B 2 inch squares.

Sew  $\frac{1}{4}$  inch on either side of the diagonal line.


Cut on the drawn line to create (2) half square triangles.

Trim these to  $1\frac{1}{2}$  inches.

Draw another diagonal line on the back of the HST that is perpendicular to the seam line as shown. This is your sewing line.

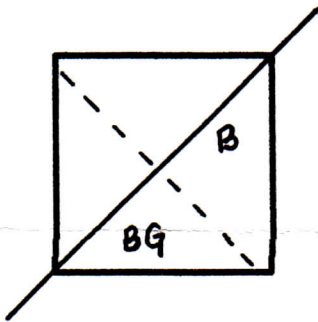

Position one HST on each outside corner of the heart top as shown. Sew on the diagonal line. Press open. Trim the excess fabric from behind.

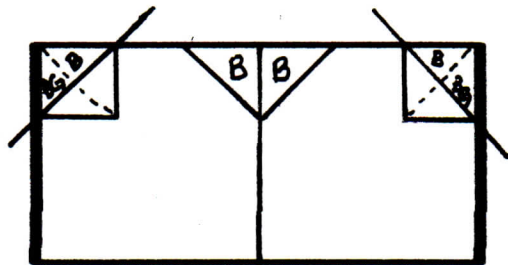

You will repeat this step with the (4)  $3\frac{3}{4}$  inch squares of FQ B and the (8)  $1\frac{1}{2}$  inch squares of background fabric. Remember to press the center seam open. Set aside.